

4


3

2

1

B

B

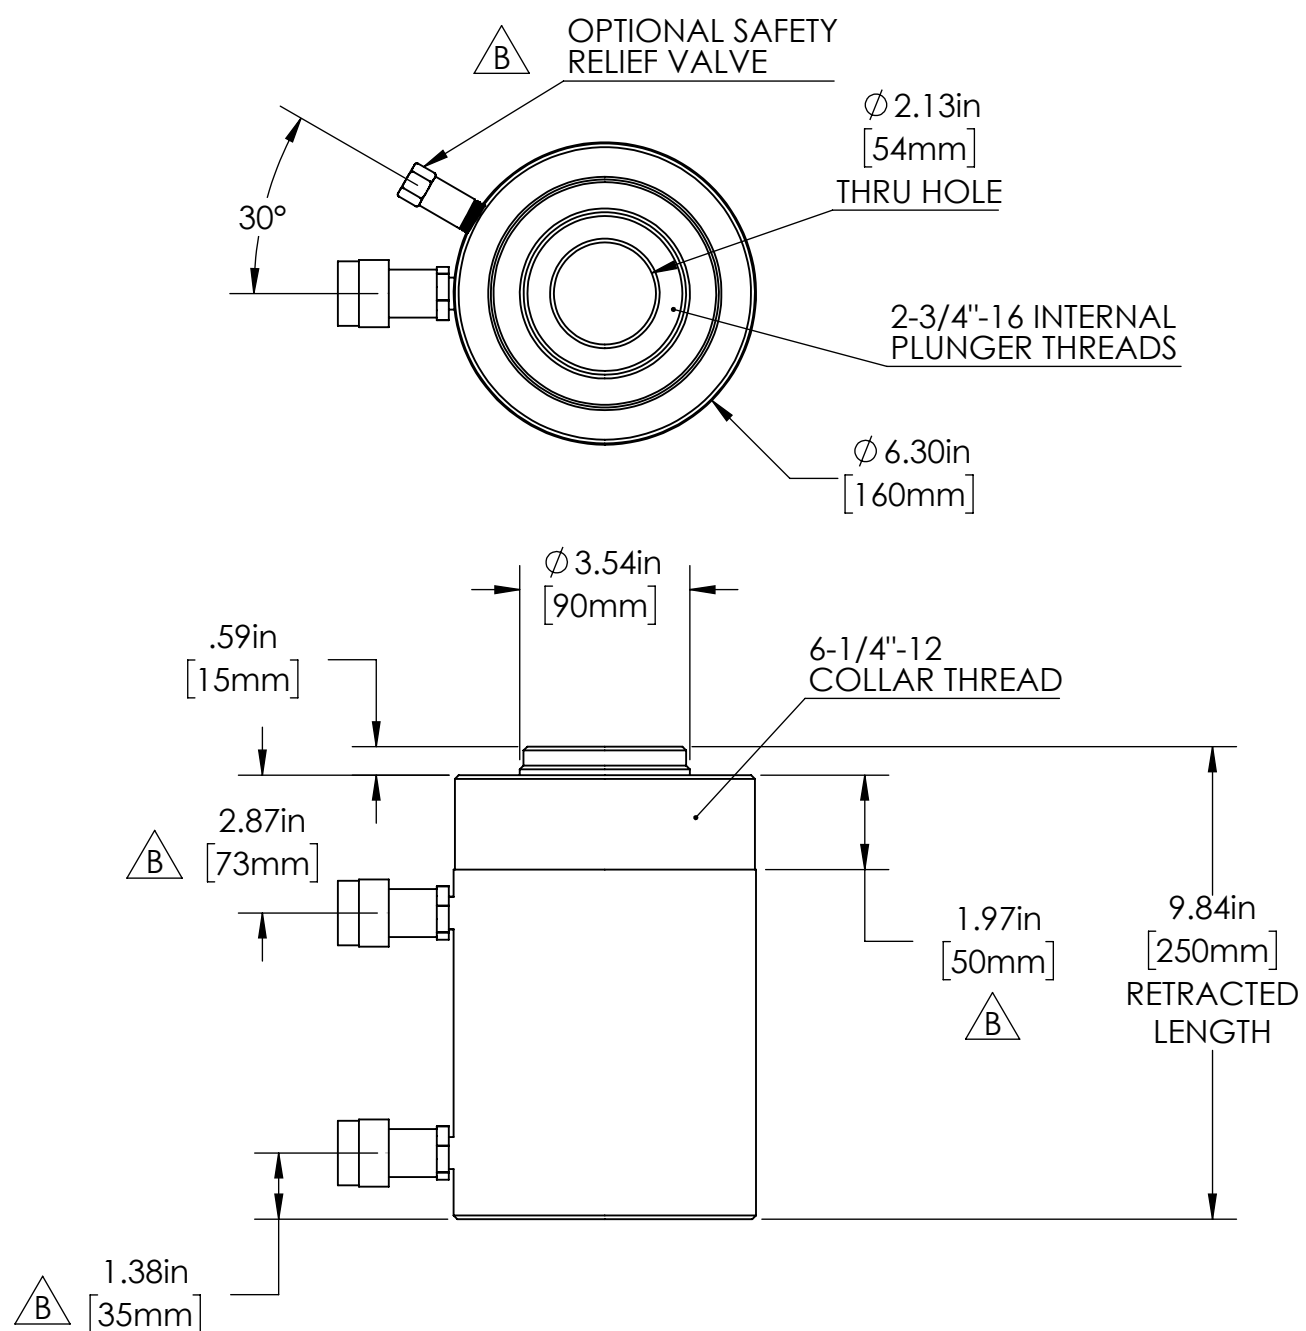

- NOTES:
1. TYPE: DOUBLE ACTING, HOLLOW ROD
 2. PUSH FORCE: 60 TONS
 3. RETRACTED LENGTH: 9.84" (250mm)
 4. EXTENDED LENGTH: 12.80" (325mm)
 5. STROKE: 2.95" (75mm)
 6. EFFECTIVE AREA, PUSH: 14.6 SQ.IN (94.25 SQ.CM.)
 7. OIL CAPACITY, PUSH: 43 CU.IN. (705CC)
 8. MAXIMUM PRESSURE: 10,000 PSI (700 BAR)
 9. HIGH FLOW COUPLERS AND DUST CAPS INCLUDED
 10. OPTIONAL RELIEF VALVE PROTECTS CYLINDER ROD END FROM OVER PRESSURIZATION
 11. HANDLES INCLUDED
 12. PAINT COLOR: POWER X RED
 13. APPROXIMATE WEIGHT: 66 LBS (30KG)

A

A

| | | | | | | |
|--|--|----------------------|------|---|-----------------|--------------|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. | | NAME | DATE | | | |
| TOLERANCES: FRACTIONAL ±1/16 ANGLES ±1° ONE PLACES ±.050 (1.25mm) TWO PLACES ±.010 (.25mm) THREE PLACES ±.005 (.13mm) FINISH 125 MAX C/B .020 | | DRAWN | JJJ | | 04/23/18 | |
| THIRD ANGLE PROJECTION | | CHECKED | | TITLE: | | |
| | | ENG APPR. | | CYLINDER, DOUBLE ACTING, HOLE THRU - INSTALLATION | | |
| | | MFG APPR. | | SIZE | DWG. NO. | REV |
| | | Q.A. | | B | CHD60-3 INSTALL | B |
| MATERIAL | | COMMENTS: | | SCALE: 1:4 | WEIGHT: | SHEET 1 OF 1 |
| FINISH | | DO NOT SCALE DRAWING | | | | |

| | | | | | | |
|-----------|------------|----------|---------|--|----------|------------|
| B | C18-05-052 | 5/2/2018 | JJJ | 1.38" WAS 1.26"; 2.87" WAS 2.56"; 1.97" WAS 1.91"; ADDED OPTIONAL RELIEF VALVE NOTE; ADDED NOTES 11 AND 12 | JJJ | 05/03/18 |
| REV. | ECN. | DATE | DRAWNBY | DESCRIPTION | APPROVED | APPR. DATE |
| REVISIONS | | | | | | |

4

3

2

1